

| tip / type | anahtarlama tipi<br>switching type | giriş sinyali /<br>input signal | anahtarlama gerilimi /<br>switching voltage | anahtarlama akımı /<br>switching current | izolasyon /<br>isolation | sipariş no /<br>order no |
|------------|------------------------------------|---------------------------------|---------------------------------------------|------------------------------------------|--------------------------|--------------------------|
| OPK-EKI    | Yüksek Taraf/High Side             | 5V AC/DC                        | 5-48V DC                                    | 0.65A DC                                 | 1500Vrms                 | 112 010N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 12V AC/DC                       | 5-48V DC                                    | 0.65A DC                                 | 1500Vrms                 | 112 110N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 24V AC/DC                       | 5-48V DC                                    | 0.65A DC                                 | 1500Vrms                 | 112 220N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 48V AC/DC                       | 5-48V DC                                    | 0.65A DC                                 | 1500Vrms                 | 112 320N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 60V AC/DC                       | 5-48V DC                                    | 0.65A DC                                 | 1500Vrms                 | 112 420N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 110V AC/DC                      | 5-48V DC                                    | 0.65A DC                                 | 1500Vrms                 | 112 520N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 220V AC/DC                      | 5-48V DC                                    | 0.65A DC                                 | 1500Vrms                 | 112 620N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 9-72V DC                        | 3-30V DC                                    | 5A DC                                    | 2500Vrms                 | 112 710N                 |
| OPK-EKI    | Düşük Taraf/Low Side               | 9-72V DC                        | 3-30V DC                                    | 5A DC                                    | 5000Vrms                 | 112 720N                 |
| OPK-EKI    | Yüksek Taraf/High Side             | 9-72V DC                        | 24-260V AC                                  | 0.5A AC                                  | 5000Vrms                 | 112 730N                 |


### teknik özellikler

|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Tepki süresi             | < 10msn (112 010N, 112 110N, 112 220N, 112 320N, 112 420N, 112 520N, 112 620N )<br>< 500usn (112 710N, 112 720N, 112 730N ) |
| Çalışma sıcaklık aralığı | -20°C .. 60°C                                                                                                               |
| Bağlantı                 | Yay baskılı                                                                                                                 |
| Maksimum kablo kesiti    | 2.5mm <sup>2</sup>                                                                                                          |
| Montaj tipi              | Raya montaj                                                                                                                 |
| Montaj rayı              | MR 35 x 7.5 / MR 35 x 15                                                                                                    |

### technical specifications

|                          |                                                                                                                                |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Response time            | < 10msec (112 010N, 112 110N, 112 220N, 112 320N, 112 420N, 112 520N, 112 620N )<br>< 500 usec (112 710N, 112 720N, 112 730N ) |
| Operating temperature    | -20°C .. 60°C                                                                                                                  |
| Bağlantı                 | Cage Clamp                                                                                                                     |
| Max. cable cross-section | 2.5mm <sup>2</sup>                                                                                                             |
| Mounting type            | Rail mounted                                                                                                                   |
| Mounting rail            | MR 35 x 7.5 / MR 35 x 15                                                                                                       |

### bağlantılar / connections

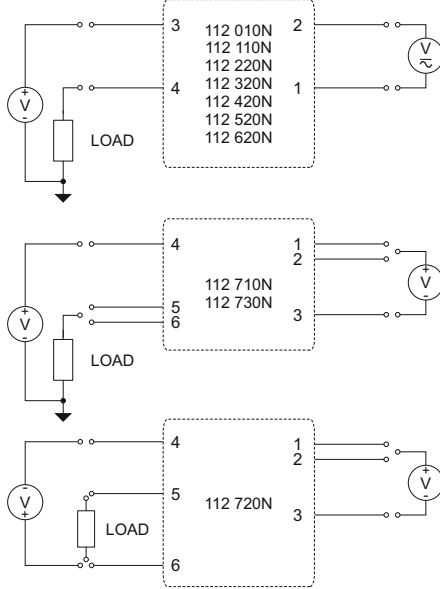

### boyutlar / dimensions

